



STRIDER~RESOURCE

WIRELESS LOAD CELL ~ TELEMETRY TENSION METER

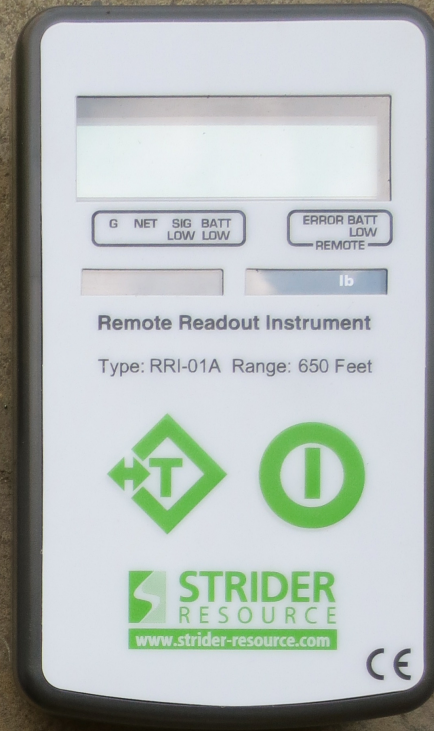

- Telemetry load cell with a range of 650 feet.
- Can be set to read Tons, Tonnes, Lbs or Kgs.
- Accuracy better than 0.5% of applied load.
- Made from very lightweight Aerospace alloy.
- Hermetically sealed for use in wet conditions.
- Self contained - Internal antenna and cabling.
- Full range of wireless accessories available.
- Custom label program available.
- 12 month warranty (conditions apply).

Description	SR 5 TTM	SR 10 TTM	SR 25 TTM	SR 50 TTM	SR 100 TTM	SR 200 TTM
Capacity	11,000 Lbs.	22,000 Lbs.	55,000 Lbs.	110,000 Lbs.	220,000 Lbs.	440,000 Lbs
Weight	3.5 Lbs.	4.4 Lbs.	8.0 Lbs.	23.0 Lbs.	59.5 Lbs.	143.0 Lbs.
Resolution	1.00 Lbs.					
Display	Type: LCD 8 Digit 12.7mm - 1/2" Characters Update Rate: 330mS					
Battery	Load Cell: 2 x AAA Alkaline Handheld: 2 x AA Alkaline Life: 100 hours continuous, 1.5 years standby					
Accuracy/Range	Accuracy better than 0.5% of applied load Range: 650 Feet (max)					
Safety	Working Load Limit: 4:1 (Across range) IP Rating: IP65 (BS EN 60529)					

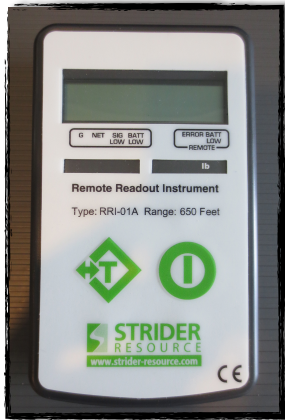


Radio Type	Transceiver (2 way)
Radio Frequency	2.4 GHz
Range	650 Feet (max)
Data Rate	250 K bits/sec
Environmental Sealing/IP Rating	IP65
Operating Temperature Range	-10° C / 14° F to 50° C / 122° F
Humidity	95% RH

TTM WIRELESS TRANSMITTER

- Portable handheld display indicator for displaying data from one sensor.
- Ability to wirelessly 'power off' the Acquisition Module two button tactile keypad.
- Worldwide license exempt proprietary 2.4 GHz radio.
- 650 Feet maximum range.
- Environmentally sealed to IP65.

TTM LOAD CELL APPLICATIONS

- Water Weight Testing
- Overhead Weighing
- Load Cell Rentals
- Bollard Pulling
- Line Construction: Power Line / Telecom
- Tug Testing
- Stevedoring
- Heavy Lifting
- Fall Protection Tests

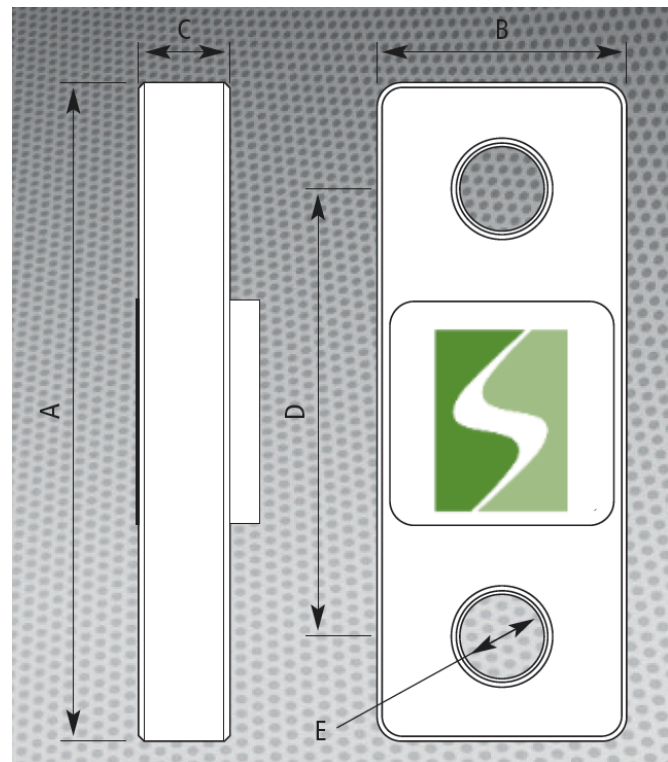

Made with pride in England

Dimension (Inches)	SR 5 TTM	SR 10 TTM	SR 25 TTM	SR 50 TTM	SR 100 TTM	SR 200 TTM
Dimension A	9.84	11.41	12.59	16.14	21.26	27.16
Dimension B	3.74	3.97	5.00	5.98	8.26	12.20
Dimension C	1.37	1.96	2.16	2.95	4.72	5.70
Dimension D	6.69	7.08	7.87	9.84	12.59	15.59
Dimension E	1.18	1.88	2.16	2.99	3.93	5.31

Strider~Resource

5667 King Road, Nobleton, Ontario, Canada, L0G 1N0

www.strider-resource.com service@strider-resource.com Phone: 905.859.3901 Fax: 905.859.4345